

# Alienware m16 R1

## Setup and Specifications

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

# Contents

<b>Chapter 1: Set up your Alienware m16 R1</b> .....	<b>4</b>
<b>Chapter 2: Views of Alienware m16 R1</b> .....	<b>5</b>
Display.....	5
Left.....	6
Top.....	6
Back.....	7
Bottom.....	8
<b>Chapter 3: Specifications of Alienware m16 R1</b> .....	<b>9</b>
Dimensions and weight.....	9
Processor.....	9
Chipset.....	10
Operating system.....	10
Memory.....	10
External ports.....	11
Internal slots.....	12
Ethernet.....	12
Wireless module.....	12
Audio.....	13
Storage.....	13
RAID (Redundant Array of Independent Disks).....	14
Media-card reader.....	14
Keyboard.....	15
Camera.....	15
Touchpad.....	16
Power adapter.....	16
Battery.....	17
Display.....	18
GPU—Integrated.....	19
GPU—Discrete.....	19
External display support.....	19
Operating and storage environment.....	19
<b>Chapter 4: Keyboard shortcuts</b> .....	<b>21</b>
<b>Chapter 5: Low blue light</b> .....	<b>23</b>
<b>Chapter 6: Alienware Command Center</b> .....	<b>24</b>
<b>Chapter 7: Getting help and contacting Alienware</b> .....	<b>25</b>

# Set up your Alienware m16 R1


**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

Connect the power adapter and press the power button.




# Views of Alienware m16 R1

## Display

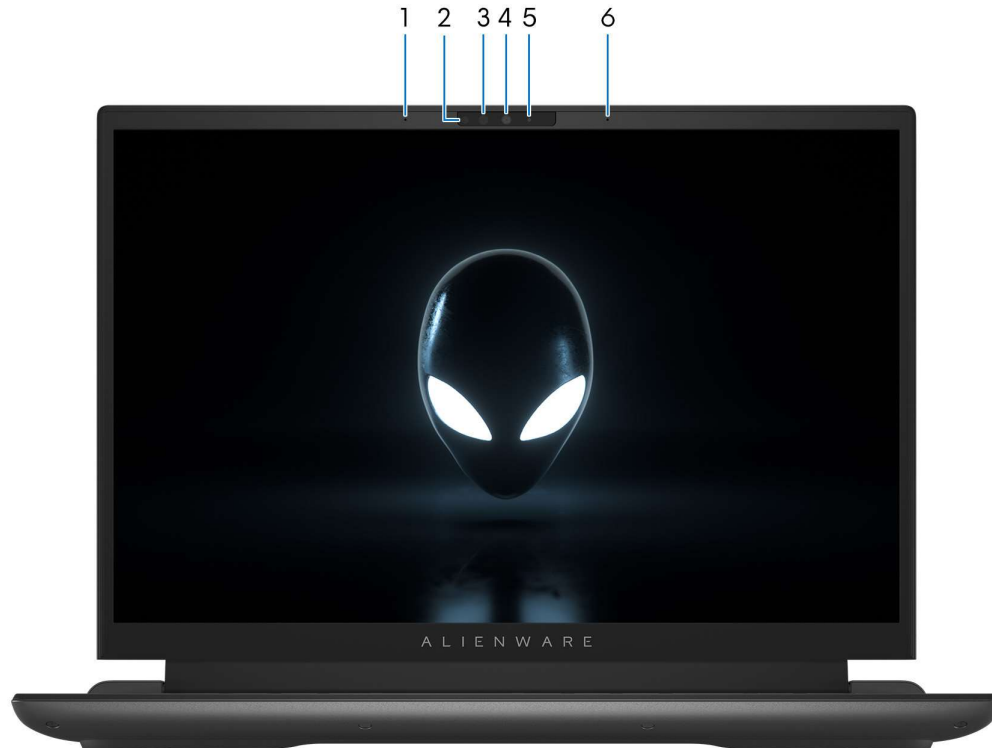

- 1. Left microphone**  
Provides digital sound input for audio recording and voice calls.
- 2. Infrared emitter**  
Emits infrared light, which enables the infrared camera to sense and track motion.
- 3. Infrared camera**  
Enhances security when paired with Windows Hello face authentication.
- 4. Camera**  
Enables you to video chat, capture photos, and record videos.
- 5. Camera-status light**  
Turns on when the camera is in use.
- 6. Right microphone**  
Provides digital sound input for audio recording and voice calls.

# Left

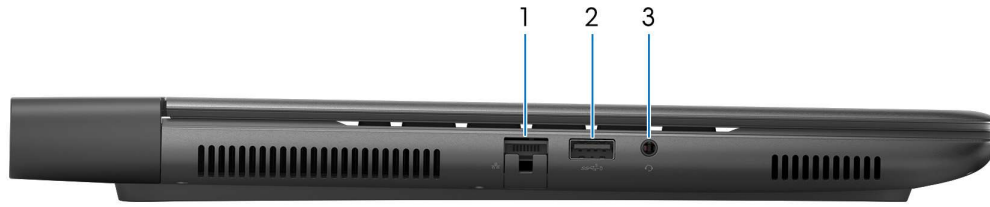

## 1. Network port

Connect an Ethernet (RJ45) cable from a router or a broadband modem for network or Internet access.

## 2. USB 3.2 Gen 1 port with PowerShare

Connect devices such as external storage devices and printers.

Provides data transfer speeds up to 5 Gbps. PowerShare enables you to charge your USB devices even when your computer is turned off.

**i** **NOTE:** If your computer is turned off or in hibernate state, you must connect the power adapter to charge your devices using the PowerShare port. You must enable this feature in the BIOS setup program.

**i** **NOTE:** Certain USB devices may not charge when the computer is turned off or in sleep state. In such cases, turn on the computer to charge the device.

## 3. Universal audio jack

Connect headphones or a headset (headphone and microphone combo).

# Top



### 1. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

### 2. Left-click area

Press to left-click.

### 3. Right-click area


Press to right-click.

### 4. Power button (Alien head)


Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

Press to put the computer into sleep state if it is turned on.

When the computer is turned on, press and hold the power button for four seconds to force shut-down the computer.


 **NOTE:** You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at [Manuals at Dell Support Site](#).


## Back

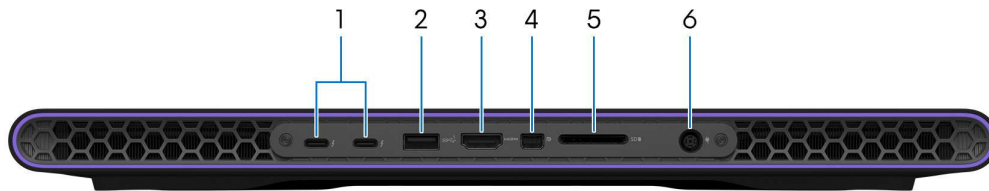



### 1. Thunderbolt 4.0 ports (2)

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

 **NOTE:** A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

 **NOTE:** USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

 **NOTE:** Thunderbolt 4 supports two 4K displays or one 8K display.

 **NOTE:** The Thunderbolt 4 ports do not support charging the battery of your computer using a Type-C power adapter.

### 2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

### 3. HDMI 2.1 port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

### 4. Mini-DisplayPort

Connect to a TV or another DisplayPort-in enabled device. Mini DisplayPort provides video and audio output.


### 5. SD-card slot

Reads from and writes to the SD card.

### 6. Power-adapter port

Connect a power adapter to provide power to your computer.

# Bottom

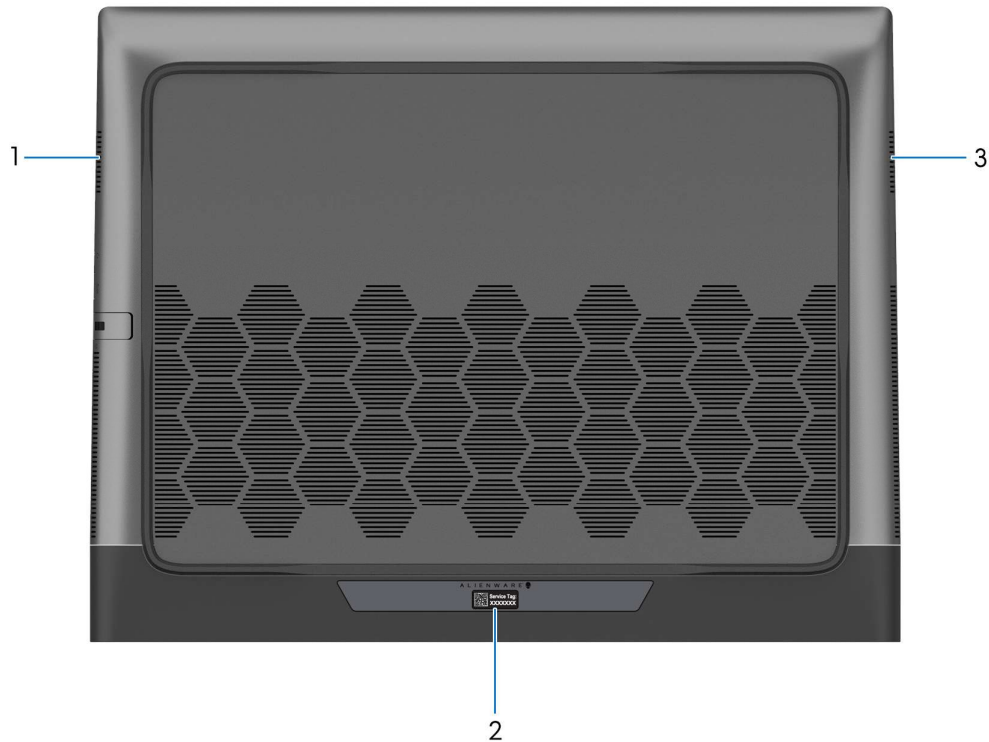

## 1. Left speaker

Provides audio output.

## 2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

## 3. Right speaker

Provides audio output.



# Specifications of Alienware m16 R1

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Alienware m16 R1.

**Table 1. Dimensions and weight**

Description	Values
Height:	
Front height	23.10 mm (0.91 in.)
Rear height	23 mm (0.90 in.)
Width	368.90 mm (14.52 in.)
Depth	289.90 mm (11.41 in.)
Weight <i>i</i> <b>NOTE:</b> The weight of your computer depends on the configuration that is ordered and manufacturing variability.	3.25 kg (7.17 lb) - maximum

## Processor

The following table lists the details of the processors supported by your Alienware m16 R1.

**Table 2. Processor**

Description	Option one	Option two	Option three
Processor type	13 <sup>th</sup> Generation Intel Core i9-13980HX	13 <sup>th</sup> Generation Intel Core i9-13900HX	13 <sup>th</sup> Generation Intel Core i7-13700HX
Processor wattage	55 W	55 W	55 W
Processor total core count	24	24	16
Performance-cores	8	8	8
Efficient-cores	16	16	8
Processor total thread counts <i>i</i> <b>NOTE:</b> Intel® Hyper-Threading Technology is only available on Performance-cores.	32	32	24
Processor speed	Up to 5.50 GHz	Up to 5.40 GHz	Up to 5 GHz
Performance-cores frequency			
Processor base frequency	2.20 GHz	2.20 GHz	2.10 GHz
Maximum turbo frequency	5.60 GHz	5.40 GHz	5 GHz
Efficient-cores frequency			

**Table 2. Processor (continued)**

Description	Option one	Option two	Option three
Processor base frequency	1.60 GHz	1.60 GHz	1.50 GHz
Maximum turbo frequency	4 GHz	3.90 GHz	3.70 GHz
Processor cache	36 MB	36 MB	30 MB
Integrated graphics	Intel UHD Graphics	Intel UHD Graphics	Intel UHD Graphics

## Chipset

The following table lists the details of the chipset that is supported for your Alienware m16 R1.

**Table 3. Chipset**

Description	Values
Chipset	HM770
Processor	13th Generation Intel Core i7/i9
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen 4.0

## Operating system


Your Alienware m16 R1 supports the following operating systems:

- Windows 11 Home (64-bit)
- Windows 11 Professional (64-bit)

## Memory

The following table lists the memory specifications of your Alienware m16 R1.

**Table 4. Memory specifications**

Description	Values
Memory slots	Two-SODIMM slots
Memory type	DDR5
Memory speed	4800 MT/s, 5200 MT/s, 5600 MT/s, 5800 MT/s  <b>NOTE:</b> The memory configuration varies depending on the country or region the computer is purchased in.
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory size per slot	8 GB, 16 GB and 32 GB

**Table 4. Memory specifications (continued)**

Description	Values
Memory configurations supported	<ul style="list-style-type: none"> <li data-bbox="821 260 1450 344">● 16 GB, 2 x 8 GB, DDR5, 4800 MT/s, dual-channel  <i>i</i> <b>NOTE:</b> This is applicable for 13<sup>th</sup> Generation Intel Core i7-13700HX</li> <li data-bbox="821 350 1450 464">● 16 GB, 2 x 8 GB, DDR5, 5600 MT/s, dual-channel  <i>i</i> <b>NOTE:</b> This is applicable for 13<sup>th</sup> Generation Intel Core i9-13980HX and 13<sup>th</sup> Generation Intel Core i9-13900HX</li> <li data-bbox="821 470 1450 583">● 32 GB, 2 x 16 GB, DDR5, 5600 MT/s, dual-channel  <i>i</i> <b>NOTE:</b> This is applicable for 13<sup>th</sup> Generation Intel Core i9-13980HX and 13<sup>th</sup> Generation Intel Core i9-13900HX</li> <li data-bbox="821 590 1450 703">● 64 GB, 2 x 32 GB, DDR5, 5200 MT/s, dual-channel  <i>i</i> <b>NOTE:</b> This is applicable for 13<sup>th</sup> Generation Intel Core i9-13980HX and 13<sup>th</sup> Generation Intel Core i9-13900HX</li> <li data-bbox="821 709 1450 856">● 32 GB, 2 x 16 GB, DDR5, 5800 MT/s, XMP, dual-channel  <i>i</i> <b>NOTE:</b> When purchasing your computer, Dell offers an XMP memory configuration of 32 GB with 5800 MT/s speed. To utilize this speed, ensure that you enable XMP by going to the system settings or BIOS.</li> <li data-bbox="821 863 1450 993">● <b>NOTE:</b> Your computer will not support upgrading to an XMP memory later after point of sale. Additionally, if the memory is upgraded from 32 GB to 64 GB, your computer will not support the XMP feature.</li> </ul>

## External ports

The following table lists the external ports of your Alienware m16 R1.

**Table 5. External ports**

Description	Values
Network port	One RJ-45 port
USB ports	<ul style="list-style-type: none"> <li data-bbox="821 1341 1094 1367">● One USB 3.2 Gen 1 port</li> <li data-bbox="821 1373 1263 1398">● One USB 3.2 Gen 1 port with PowerShare</li> <li data-bbox="821 1404 1094 1430">● Two Thunderbolt 4 ports</li> </ul>
Audio port	One universal audio jack (RCA, 3.5 mm)
Video port	<ul style="list-style-type: none"> <li data-bbox="821 1522 1045 1547">● One HDMI 2.1 port</li> <li data-bbox="821 1554 1068 1579">● One mini-DisplayPort</li> </ul>
Media-card reader	One SD-card slot
Power-adaptor port	One 7.40 mm x 5.10 mm DC-in
Security-cable slot	Not supported

# Internal slots

The following table lists the internal slots of your Alienware m16 R1.

**Table 6. Internal slots**

Description	Values
M.2	<ul style="list-style-type: none"> <li>Two M.2 2230 and two M.2 2280 solid-state drive slots, for computers shipped with NVIDIA GeForce RTX 4080/4090 graphics card</li> <li>Two M.2 2280 solid-state drive slots, for computers shipped with NVIDIA GeForce RTX 4050/4060/4070 graphics card</li> </ul> <p><b>NOTE:</b> To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at <a href="#">Dell Support Site</a>.</p>

# Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Alienware m16 R1.

**Table 7. Ethernet specifications**

Description	Values
Model number	<ul style="list-style-type: none"> <li>Killer E3100 integrated Ethernet controller, for computers shipped with NVIDIA GeForce RTX 4050/4060/4070/4080/4090 graphics card</li> <li>Realtek RTL8111 Gigabit integrated Ethernet controller, for computers shipped with NVIDIA GeForce RTX 4050 graphics card</li> </ul>
Transfer rate	<ul style="list-style-type: none"> <li>2500 Mbps for Killer E3100 Ethernet controller</li> <li>1000 Mbps for Realtek RTL8111 Gigabit Ethernet controller</li> </ul>


# Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules that are supported on your Alienware m16 R1.

**Table 8. Wireless module specifications**

Description	Option one	Option two
Model number	Intel Killer AX1675i	Intel Killer AX1690i
Transfer rate	Up to 2400 Mbps	Up to 2974 Mbps
Frequency bands supported	2.4 GHz/ 5 GHz/ 6 GHz	2.4 GHz/ 5 GHz/ 6 GHz
Wireless standards	<ul style="list-style-type: none"> <li>WiFi 802.11a/b/g</li> <li>Wi-Fi 4 (WiFi 802.11n)</li> <li>Wi-Fi 5 (WiFi 802.11ac)</li> <li>Wi-Fi 6E (WiFi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>WiFi 802.11a/b/g</li> <li>Wi-Fi 4 (WiFi 802.11n)</li> <li>Wi-Fi 5 (WiFi 802.11ac)</li> <li>Wi-Fi 6E (WiFi 802.11ax)</li> </ul>
Encryption	<ul style="list-style-type: none"> <li>64-bit/128-bit WEP</li> <li>AES-CCMP</li> </ul>	<ul style="list-style-type: none"> <li>64-bit/128-bit WEP</li> <li>AES-CCMP</li> </ul>

**Table 8. Wireless module specifications (continued)**

Description	Option one	Option two
	<ul style="list-style-type: none"> <li>TKIP</li> </ul>	<ul style="list-style-type: none"> <li>TKIP</li> </ul>
Bluetooth wireless card	Bluetooth 5.3	Bluetooth 5.3
	 <b>NOTE:</b> The version of the Bluetooth wireless card may vary depending on the operating system that is installed on your computer.	

## Audio

The following table lists the audio specifications of your Alienware m16 R1.

**Table 9. Audio specifications**

Description	Values	
Audio controller	Realtek ALC3254	
Stereo conversion	Supported	
Internal audio interface	High definition audio interface	
External audio interface	<ul style="list-style-type: none"> <li>One universal audio jack (RCA, 3.5 mm)</li> <li>One HDMI 2.1 port</li> </ul>	
Number of speakers	2	
Internal-speaker amplifier	Supported	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	4 W
Subwoofer output	Not supported	
Microphone	Digital-array microphones in camera assembly	

## Storage

This section lists the storage options on your Alienware m16 R1.

Your Alienware m16 R1 supports the following storage configuration:

- Two M.2 2230 and two M.2 2280 solid-state drive slots, for computers shipped with NVIDIA GeForce RTX 4080/4090 graphics card
- Two M.2 2280 solid-state drive slots, for computers shipped with NVIDIA GeForce RTX 4050/4060/4070 graphics card

The primary drive of your Alienware m16 R1 varies with the storage configuration. The primary drive of your computer is the M.2 2280 drive where the operating system is installed.

**Table 10. Storage specifications**

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	PCIe Gen4 x4 NVMe, up to 64 Gbps	Up to 512 GB
M.2 2280 solid-state drive	PCIe Gen4 x4 NVMe, up to 64 Gbps	Up to 4 TB

## RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell recommends drive models that are identical.

**i** | **NOTE:** RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any IO operations with block sizes larger than the stripe size will split the IO and become constrained by the slowest of the drives. For RAID 0 IO operations where block sizes are smaller than the stripe size, whichever drive the IO operation targets will determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in very small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all IO operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the IO operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random IO operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all IO types. One of the worst examples of constrained performance here is when using unbuffered IO. To ensure writes are fully committed to non-volatile regions of the RAID volume, unbuffered IO bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the IO operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of IO operation completely negates any advantage of a higher performing drive in the volume.

Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have very different performance characteristics for certain types of IO operations. Thus, matching by model ensures that the RAID volumes is comprised of an homogeneous array of drives that will deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

Alienware m16 R1 supports RAID 0/1/5 with more than one SSD configuration, for computers shipped with NVIDIA GeForce RTX 4080/4090 graphics card.

Alienware m16 R1 supports RAID 0/1 with more than one SSD configuration, for computers shipped with NVIDIA GeForce RTX 4050/4060/4070 graphics card.

## Media-card reader

The following table lists the media cards that are supported on your Alienware m16 R1.

**Table 11. Media-card reader specifications**

Description	Values
Media-card type	One SD card slot
Media-cards supported	<ul style="list-style-type: none"> <li>Secure Digital (SD)</li> <li>Secure Digital High Capacity (SDHC)</li> <li>Secure Digital Extended Capacity (SDXC)</li> </ul>
<b>i</b>   <b>NOTE:</b> The maximum capacity that is supported by the media-card reader varies depending on the standard of the media card that is installed on your computer.	

# Keyboard

The following table lists the keyboard specifications of your Alienware m16 R1.

**Table 12. Keyboard specifications**

Description	Values
Keyboard type	<ul style="list-style-type: none"><li>• 1-zone RGB keyboard</li><li>• RGB per key</li><li>• RGB per key, backlit Cherry mechanical keyboard</li></ul>
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"><li>• United States and Canada: 85 keys</li><li>• United Kingdom: 86 keys</li><li>• Japan: 89 keys</li></ul>
Keyboard size	X=19.05 mm key pitch Y=19.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p> <p>For more information, see <a href="#">Keyboard shortcuts</a>.</p>

# Camera

The following table lists the camera specifications of your Alienware m16 R1.

**Table 13. Camera specifications**

Description	Values
Number of cameras	One
Camera type	<ul style="list-style-type: none"><li>• One FHD RGB camera, for computers shipped with a 165 Hz QHD+ display</li><li>• One FHD-RGB Infrared camera, for computers shipped with a 240 Hz QHD+ and 480 Hz FHD+ display</li></ul>
Camera location	Front camera
Camera sensor type	CMOS sensor technology
Camera resolution:	
Still image	2.07 megapixel
Video	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:	
Still image	0.23 megapixel

**Table 13. Camera specifications (continued)**

Description		Values
	Video	640 x 360 at 30 fps
Diagonal viewing angle:		
	Camera	<ul style="list-style-type: none"> <li>FHD RGB: 82 degrees</li> <li>FHD-RGB Infrared: 80 degrees</li> </ul>
	Infrared camera	86.6 degrees

## Touchpad

The following table lists the touchpad specifications of your Alienware m16 R1.

**Table 14. Touchpad specifications**

Description		Values
Touchpad resolution:		
	Horizontal	>300 DPI
	Vertical	749
Touchpad dimensions:		
	Horizontal	112 mm (4.41 in.)
	Vertical	65 mm (2.56 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft Knowledge Base article at <a href="#">Microsoft Support Site</a> .

## Power adapter


The following table lists the power adapter specifications of your Alienware m16 R1.

**Table 15. Power adapter specifications**

Description	Option one	Option two
Type	330 W AC adapter	330 W SFF AC adapter
Connector dimensions:		
	External diameter	7.40 mm
	Internal diameter	5.10 mm
Power-adapter dimensions:		
	Height	43 mm (1.69 in.)
	Width	100 mm (3.94 in.)
	Depth	200 mm (7.87 in.)
Input voltage	100 VAC–240 VAC	100 VAC–240VAC




**Table 15. Power adapter specifications (continued)**

Description		Option one	Option two
Input frequency		50 Hz–60 Hz	50 Hz–60 Hz
Input current (maximum)		4.40 A	4.40 A
Output current (continuous)		16.92 A	16.92 A
Rated output voltage		19.50 VDC	19.50 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>			

## Battery

The following table lists the battery specifications of your Alienware m16 R1.

**Table 16. Battery specifications**

Description		Values
Battery type		6-cell lithium-ion (86 Wh)
Battery voltage		11.40 VDC
Battery weight (maximum)		0.34 kg (0.75 lb)
Battery dimensions:		
	Height	7.56 mm (0.30 in.)
	Width	295.20 mm (11.62 in)
	Depth	77.70 mm (3.06 in.)
Temperature range:		
	Operating	<ul style="list-style-type: none"> <li>Charging: 0°C to 50°C (32°F to 122°F)</li> <li>Discharging: 0°C to 60°C (32°F to 140°F)</li> </ul>
	Storage	-20°C to 65°C (-4°F to 149°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)  <b>NOTE:</b> Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about Dell Power Manager, search in the Knowledge Base Resource at <a href="#">Dell Support Site</a> .		<ul style="list-style-type: none"> <li>Standard charging: 3 hours, when computer is turned off</li> <li>ExpressCharge: 2 hours, when computer is turned off</li> <li>ExpressChargeBoost: 20 minutes, from 0% up to 35% when computer is turned off</li> </ul>
Coin-cell battery		None

**Table 16. Battery specifications (continued)**

Description	Values
⚠	<b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>
⚠	<b>CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption. If your battery charge is depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.</b>

## Display

The following table lists the display specifications of your Alienware m16 R1.

**Table 17. Display specifications**

Description	Option one	Option two	Option three
Display type	16-inch, Quad High Definition plus (QHD+)	16-inch, Quad High Definition plus (QHD+)	16-inch, Full High Definition plus (FHD+)
Display-panel technology	Wide Viewing Angle (WVA)	Wide Viewing Angle (WVA)	Wide Viewing Angle (WVA)
Display-panel dimensions (active area):			
Height	215.42 mm	215.42 mm	215.42 mm
Width	344.68 mm	344.68 mm	344.68 mm
Diagonal	406.46 mm	406.46 mm	406.46 mm
Display-panel native resolution	2560 x 1600	2560 x 1600	1920 x 1200
Luminance (typical)	300 nits	300 nits	300 nits
Megapixels	4.1	4.1	2.3
Color gamut (typical)	sRGB 100%	DCI-P3 100%	DCI-P3 100%
Pixels Per Inch (PPI)	188.70	188.70	141.50
Contrast ratio (typical)	1000:1	1000:1	1000:1
Response time (typical)	<ul style="list-style-type: none"> <li>• With Overdrive: 3 ms</li> <li>• Without Overdrive: 7 ms</li> </ul>	<ul style="list-style-type: none"> <li>• With Overdrive: 3 ms</li> <li>• Without Overdrive: 7 ms</li> </ul>	<ul style="list-style-type: none"> <li>• With Overdrive: 3 ms</li> <li>• Without Overdrive: 7 ms</li> </ul>
Refresh rate	165 Hz	240 Hz	480 Hz
Horizontal view angle (typical)	+/- 85 degrees	+/- 85 degrees	+/- 85 degrees
Vertical view angle (typical)	+/- 85 degrees	+/- 85 degrees	+/- 85 degrees
Pixel pitch	0.13 mm	0.13 mm	0.18 mm
Power consumption (maximum)	6 W	7.2 W	6.75 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare
Touch options	Not supported	Not supported	Not supported

**Table 17. Display specifications (continued)**

Description	Option one	Option two	Option three
Adaptive sync support	G-SYNC, AdaptiveSync	G-SYNC, AdaptiveSync	G-SYNC, AdaptiveSync

## GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Alienware m16 R1.

**Table 18. GPU—Integrated**

Controller	Memory size	Processor
Intel UHD Graphics	Shared system memory	13th Generation Intel Core i7/i9

## GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Alienware m16 R1.

**Table 19. GPU—Discrete**

Controller	Memory size	Memory type
NVIDIA GeForce RTX 4050	6 GB	GDDR6
NVIDIA GeForce RTX 4060	8 GB	GDDR6
NVIDIA GeForce RTX 4070	8 GB	GDDR6
NVIDIA GeForce RTX 4080	12 GB	GDDR6
NVIDIA GeForce RTX 4090	16 GB	GDDR6

## External display support

The following table lists the external display support for your Alienware m16 R1.

**Table 20. External display support**


Graphics card	Supported external displays with laptop display enabled	Supported external displays with laptop display disabled
<ul style="list-style-type: none"> <li>• Intel UHD Graphics</li> <li>• NVIDIA GeForce RTX 4050</li> <li>• NVIDIA GeForce RTX 4060</li> <li>• NVIDIA GeForce RTX 4070</li> <li>• NVIDIA GeForce RTX 4080</li> <li>• NVIDIA GeForce RTX 4090</li> </ul>	<ul style="list-style-type: none"> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> </ul>	<ul style="list-style-type: none"> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> <li>• 2</li> </ul>

## Operating and storage environment

This table lists the operating and storage specifications of your Alienware m16 R1.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 21. Computer environment**

<b>Description</b>	<b>Operating</b>	<b>Storage</b>
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	5% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	Not applicable
Shock (maximum)	140 G†	Not applicable
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>		

\* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.